




32H PIXEL 7.56-INCH CHARACTER FLEXIBLE CABINET LED DISPLAY

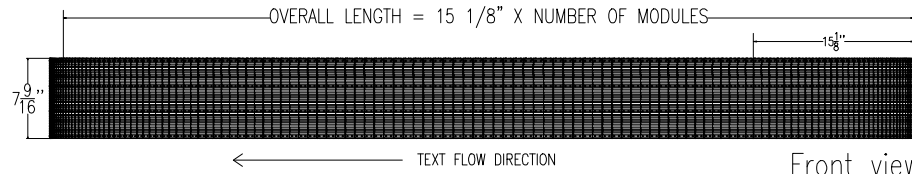


SECTION PLATE, EACH SECTION IS LABELED A1, A2, A3 ... SHOULD BE INSTALLED FOLLOWING THE SEQUENCE STARTING FROM THE RIGHT FACING FRONT

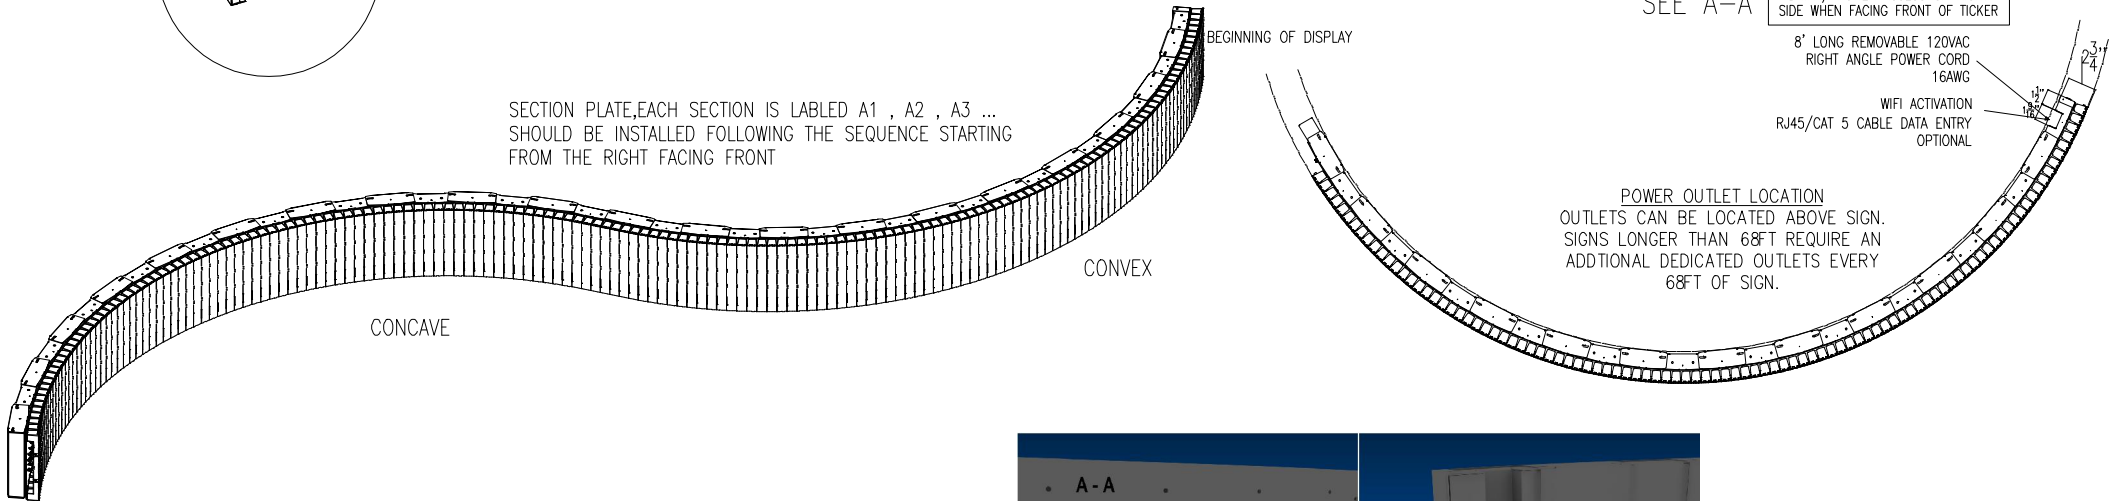

SPECIFICATIONS:

- PIXEL PITCH : .23" (6MM)
- COLOR: RGB (FULL COLOR)
- CHARACTER HEIGHT: 7.56 INCH (32H)
- ELECTRICAL REQUIREMENTS: 120VAC-220VAC/SINGLE PHASE MANUALLY SWITCHED
@ 120 VAC INDOOR - 21 WATTS/FT
POWER INPUT: POWER CORD
- DATA: XPICO WIFI OR ETHERNET
- CHASSIS METAL & FINISH: STEEL WITH BLACK POWDER COAT
- SIGN MOUNTING: WALL MOUNT
- WEIGHT : 4.5 LBS/FT
- MINIMUM RADIUS : 2 FT FOR CONCAVE AND CONVEX

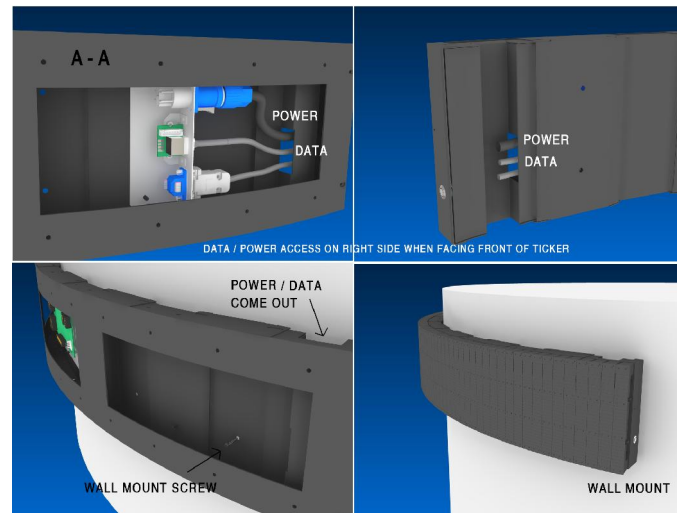

RISE TICKER		
COMPANY _____	TITLE _____	
SIGNED _____	DATE _____	
PROJECT RISETICKER SHOP DRAWING		
TITLE FLEX LED TICKER DISPLAY (32 PIXEL-6MM)		
DRAWING NO RISETICKER-326-FLEX		
SCALE : 1 / 8	DRAWN BY: JHW	DATE : 5 / 20 / 21